

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

DE-198 48 863.7

Harald Kaufmann

5 Process for the manufacture of a screen print reflection
transfer

Description

10 The invention relates to a process for the manufacture of a
screen print reflection transfer and to reflection transfer
systems manufactured according to process. In accordance with
the present invention, the term "reflection transfer" refers
to a transfer of which the reflective properties are based on
the use of an ink or carrier material, in which a plurality
15 of small reflecting particles are present.

Said reflection inks have long been known. The reflection
property of these inks is based on the fact that a plurality
of small reflecting particles are contained in the ink mass.
20 Such particles can be of spherical shape and consist of
metal, glass, metal-coated glass, or metal-coated plastic. A
suitable ink is marketed, for example, by the company of
Sericol under the commercial name "Reflec 100" and "Reflec
200".

25

Inks are also known in which the reflection particles are
present in the form of chips.

30 In the meaning of the present invention, the term reflection
inks is also understood to mean colorless or transparent
carriers and lacquers, as far as they contain reflection
particles.

According to the prior art, such inks can only be used in the screen print direct process without the reflection properties being substantially impaired.

5 According to the screen print direct process, the reflection ink is applied directly onto a substrate. Textile and plastic stripes may be used as substrates. The printing of processed textiles, such as shirts, jackets, and T-shirts, is likewise possible.

10

The known screen print direct process comprises the following process steps:

1. Introducing and positioning the substrate to be printed into the printing device;
- 15 2. Optionally printing/applying a primer coating; for example consisting of plastisol
3. Printing/applying the reflection ink.

Depending on the properties of the primer coating being used
20 and of the reflection ink, further drying steps between the individual process steps can be provided.

By means of the screen print direct process, high-quality prints can be manufactured on said substrates, whereby the
25 reflection ink has very good reflection capability.

The screen print direct process however, has a plurality of drawbacks. The printing of made-up textiles such as shirts or jackets is extremely difficult, since the seams being present
30 or other applications to the textile interfere with or impede the printing process. The exact positioning of the textile to be printed in the printing device is also necessary which leads to an increased amount of work. Additionally, the pre-

manufactured textiles must be sent to the printing office, which causes increased transport expenditure. The printing of small series in each case involves the elaborate resetting of the printing device, which is also disadvantageous.

5

In particular, due to the frequent customer's need for the printing of small series which are then sold and may be required to be re-run, depending on the market demand, the need for the printing device to be equipped in each case with the corresponding printing devices leads to an increased amount of work and increased costs.

In order to meet customer's requirements for small series which can be re-run, to achieve higher machine utilization by reduced setting-up times, and to create the possibility, to make the application onto the substrate independent from the location of the printing device, transfer systems are known to be used.

20 The known screen print transfer systems are manufactured and used as follows:

- Providing a transfer carrier, e.g. of siliconised or waxed paper;
- Applying/imprinting the ink; and
- 25 Applying/imprinting an adhesive.

If it is intended that motifs are to be manufactured with said transfer systems, the motifs are to be printed onto the transfer carrier in a mirror-reversed fashion.

30

Such transfer systems can be manufactured in a simple manner, at reasonable cost and in large numbers.

The transfers manufactured can be sent to the customer and applied at that location, according to demand, by means of a simple transfer press, onto the desired substrates. In this respect, it is possible for the end purchaser to select a motif from a plurality of pre-prepared substrates, and to have the transfer applied onto a substrate being also individually selected by him. Using such transfer systems, it is possible for substrates to be prepared at almost any desired sales locations which are provided with motifs in accordance with the customer's needs.

Application is effected by the substrate being brought into the transfer press and positioned, the transfer having the adhesive coating being applied onto the substrate and positioned, the transfer being applied on the substrate by means of the transfer press with the aid of pressure and, if necessary, increased temperature, the substrate provided with the motif being removed from the transfer press and the transfer carrier being removed from the substrate.

It has been shown, however, that, using reflection inks in the known transfer systems, the reflection inks provide hardly any reflection properties any longer after application onto the substrate which is undesirable.

The object of the present invention is to overcome the disadvantages of the prior art and to provide a reflection transfer system and a process for the manufacture thereof, in which the reflection ink provides substantial reflection properties after transferring onto the substrate.

In this case, the invention is based on the perception that the reflections with the reflection inks used according to

the invention are achieved essentially by reflection particles which are raised above the surface of the hardened ink layer. In the meaning of the present invention, it is understood in this context that at least a part of the
5 reflection particles being used project with a part of their surface out of the surface of the carrier layer.

A further object of the present invention relates to the provision of a reflection transfer system and to a process
10 for the manufacture thereof, whereby at least a part of the reflection particles of the reflection ink used according to the invention are raised above the dried ink layer.

The objects of the invention are achieved by the limitations
15 of the independent claims. Preferred embodiments are presented in the dependent claims.

The process for the manufacture of a reflection transfer system according to the invention proceeds as follows:
20

First, a primer carrier, referred to hereinafter as the base medium, is placed for the transfer which is to be applied. The base medium can usually consist of a paper or plastic film with a surface which repels adhesives. The adhesive-
25 repellant properties are achieved usually by siliconising or waxing the base medium. As base medium, all conventional and known adhesive-repellant films and strips can be used whereby the only restriction which applies is that the surface of the base medium is sufficiently adhesive-repellant in order to
30 guarantee the non-destructive release of the adhesive layer being applied. A suitable base medium is marketed, for example, by the company of B. Laufenberg GmbH under the commercial name NP 950.

In the screen print process, a transfer adhesive is imprinted on the adhesive-repelling surface of the base medium. The imprinting is carried out in this case with the correct side to accord with the motif desired. This is possible for different, freely-selectable motifs, as a surface or even free-standing. The term "free-standing motifs" is understood to mean motifs which consist of at least two parts not connected to one each other.

10

As adhesive agents, conventional heat-sensitive and/or pressure-sensitive adhesives for transfer systems may be used. A suitable adhesive agent is, for example, the adhesive available under the commercial name Metratan FT 421 from the company Sericol Co..

15

In a preferred embodiment the adhesive agent layer will be dried onto the base medium, in an optional step. This can happen through a drying stretch or another known possibility.

20

In the following process step, the reflection ink is imprinted on the adhesive agent layer in the screen print process. If it is intended that a motif should be displayed, it is imprinted with the correct side in a plan view. The print can be effected in the conventional manner in one or more colors.

25

Following, a drying step is carried out, in which the printed reflection ink and, if applicable, the adhesive agent layer, is dried. This can be effected by a drying stretch or other known possibilities.

30

The finished transfer, being formed from the adhesive agent layer and the reflection ink and being present on the base medium, can be coated or covered over, preferably full-surface, with a self-adhering flexible transfer medium. The inherently known transfer medium may consist of a film or a paper, coated with a conventional transfer adhesive. After the transfer medium has been mounted, the transfer can be brought to the application step. The application step in this context is not bound either temporally or spatially to the manufacture of the transfer.

For the applying step, the base medium is removed from the transfer and the layer of the adhesive agent is exposed. The transfer is placed on the substrate with the adhesive layer and imprinted on it with a transfer press, using heat and/or pressure. In this case, the adhesive combines with the individual substrate. In the home sector, transferring can even be carried out by means of a laundry iron, for example.

Finally, the transfer medium is removed from the now coated substrate, after cooling if appropriate.

The reflection inks used in the process according to the invention are inks of which the reflection capabilities for impinging light are based on the fact that reflecting particles are present in the ink mass. The reflecting particles may consist of metal, glass, metal-coated glass, or metal-coated plastic. The reflection particles can be spherical or almost spherical, or take the form of chips or needles. The diameter of the spherical or almost spherical particles is in the range from 10 to 110 μm , preferably from 25 to 40 μm . The longitudinal extension of the chips or

needles is in the range from 10 to 110 μm , and preferably from 40 to 80 μm .

5 The ink mass may further contain one or more pigments, as a result of which the appearance and impression in daylight is improved. The reflection also appears colored in darkness.

10 The process according to the invention makes use, in an advantageous manner, of the realization that, due to the process step of drying the reflection ink applied, the reflection properties are clearly improved. By means of this step, a transfer is manufactured which has the handling advantages of a transfer and, at the same time, provides a reflection capability which has hitherto only been achieved
15 by the direct screen print process.

Without any intention to be restricted to this, it is assumed that, by the process step of drying and hardening, the situation is reached that the reflection particles raised
20 above the ink layer are fixed in this position. This effect is supported by the fact that, during the drying process, a volume loss of the ink layer and thereby, a reduction in the thickness of the layer, in particular by the loss of water and/or solvents, occur. Due to the reduction in the layer
25 thickness during the drying and hardening process respectively, it may happen that further reflection particles protrude from the surface of the ink layer and are therefore available for the purpose of reflection. The reflection particles may protrude by about 30 % of their diameter or
30 their longitudinal extension from the surface of the dried ink layer.

Brief description of the Drawings:

Fig. 1 shows a transfer, which was manufactured according to the process according to the invention, after the process step of the drying of the reflection ink.

5

Fig. 2 shows a transfer which was manufactured according to the process according to the invention with a transfer film applied.

10 Fig. 3 shows a transfer which was manufactured according to the process according to the invention which has been applied to a substrate and is exposed to light.

15 Fig. 4 shows a transfer according to the prior art in which the reflection ink has been applied onto the transfer carrier.

20 Fig. 5 shows a transfer according to the prior art according to Fig. 4 whereby a transfer adhesive has further been applied.

25 Fig. 6 shows a transfer according to the prior art which has been applied to the substrate and is exposed to light.

30

Fig. 1 shows a transfer after the process step of drying the ink layer consisting of the base medium 1 onto which the transfer adhesive 2 is imprinted in the screen print process. The ink layer 3 is imprinted on the transfer adhesive 2 with the correct side in the screen print process. At least a part of the reflection particles 4 contained in the ink layer 3 are raised by part of their circumference

above the exposed surface of the dried and hardened ink layer.

Fig. 2 shows a reflection transfer as in Fig. 1 manufactured according to the process according to the invention, whereby a transfer film 5 provided with an adhesive agent has been additionally applied on the ink layer 3. In this case, the reflection particles 4 are no longer pressed by means of the transfer film 5 into the hardened ink layer 3.

Fig. 3 shows a reflection transfer manufactured according to the process according to the invention and comprising the transfer adhesive 2, the dried and hardened ink layer 3 with the raised reflection particles 4, whereby the transfer is applied onto the substrate 6. The impinging light rays 7 which are reflected by the reflection particles 4 can be seen additionally.

Fig. 4 shows a transfer according to the prior art in the manufacturing step, whereby the reflection ink 3' is applied onto the transfer carrier 5'. In this case, the side of the ink layer 3', later forming the surface turned towards the light, is turned towards the transfer carrier 5'. The reflection particles 4' are raised up on the side of the ink layer 2' and being directed towards the substrate later. Due to the contact of the ink layer 3' with the transfer carrier 5', the reflection particles 4' cannot protrude from the later external surface of the ink layer 3'.

Fig. 5 shows a transfer according to the prior art in the manufacturing step, in which the transfer adhesive 2' has been applied onto the reflection ink 3'. In this case, it can be recognized that the reflection particles 4' raised above

the surface of the ink layer 3' are embedded into the transfer adhesive 2'.

Fig. 6 shows a transfer according to the prior art which is applied to a substrate 6, whereby the transfer adhesive 2' is located between the substrate 6 and the ink layer 3'. The side of the ink layer 3' directed towards the impinging light 7 does not provide any raised reflection particles 4'. Due to the reflection particles 4' embedded in the ink layer 3' and the transfer adhesive 2', the impinging light beam 7 is only inadequately reflected back and shows practically no reflection effect.

Embodiment

15 In a fully-automatic screen printing machine equipped with a screen printing frame with a fabric stretch of 21 - 77, a doctor blade of multilayered polyurethane and a float blade of metal, a silicone-coated paper is placed as the base medium. Next, a transfer adhesive is imprinted in a layer
20 thickness of 100 to 300 μm . The transfer adhesive is dried in a drying stretch with an infra-red dryer at a drying temperature of between 80 - 120 °C. The reflection ink or a mixture of reflection inks is imprinted on the transfer adhesive in a wet layer thickness of 100 to 300 μm . Drying
25 then takes place in a drying stretch with an infra-red dryer at a drying temperature of between 80 - 120 °C. A transfer medium is applied onto the finished transfer, made of a paper provided with adhesive.

Claims

1. Process for the manufacture of a screen print reflection transfer, comprising the steps:

5 Providing an adhesive-repellant base medium (1);

Imprinting the base medium (1) with a transfer adhesive (2);

Imprinting the transfer adhesive (2) with a reflection ink (3), whereby the reflection ink being used is containing a plurality of reflecting particles; and

10 Drying the reflection ink (3) and the transfer adhesive.

2. Process according to claim 1, characterized in that, a transfer medium is further applied onto the dried and

15 hardened reflection ink (3).

3. Process according to claim 1 or 2, characterized in that the transfer adhesive (2) is dried after imprinting the base medium (1) and before printing the reflection ink (3).

20

4. Process according to any of the foregoing claims, characterized in that the reflection particles (4) are used, which are spherical and which have a grain diameter in the range from 10 to 100 μm , preferably 25 to 40 μm , or which

25 substantially have the form of chips or needles and a longitudinal extension in the range from 10 to 110 μm , preferably 40 to 80 μm , or a mixture thereof.

5. Process according to any of the foregoing claims, characterized in that the transfer adhesive (2) and the reflection ink (3) are imprinted in such a way that the motif represented is of the correct side in the plan view.

30

6. Reflection transfer manufactured in accordance with a process according to any of the foregoing claims.

7. Substrate onto which a reflection transfer is applied
5 which is manufactured according to any of claims 1 to 5.

8. Reflection transfer having the layer sequence:
Base medium (1), transfer adhesive (2), reflection ink (3),
whereby the reflection ink (3) contains a plurality of
10 reflection particles (4) and whereby the reflection particles
(4) are raised above the surface of the hardened reflection
ink (3).

9. Reflection transfer according to claim 8,
15 characterized in that a transfer medium (5) is applied onto
the reflection ink (3) with the raised reflection particles
(4).

10. Reflection transfer according to claim 8 or 9,
20 characterized in that the reflection particles (4) are
substantially spherical and have a grain diameter in the
range from 10 to 100 μm , preferably 25 to 40 μm , or that they
have the shape of chips or needles with a longitudinal
extension in the range from 10 to 110 μm , preferably 40 to 80
25 μm , or that they are mixtures thereof.

"Process for the manufacture of a screen print reflection transfer"

Abstract

5

The invention relates to a process for the manufacture of a screen print reflection transfer and to reflection transfer systems manufactured according to process in which the reflection ink contains a plurality of reflection particles.

10

The reflection transfer has the layer sequence: carrier material, adhesive layer and ink layer in which the reflecting particles are on the surface of said ink layer.

Fig. 1

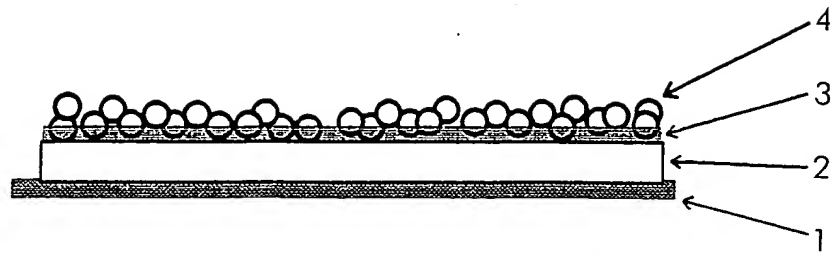


Fig. 2


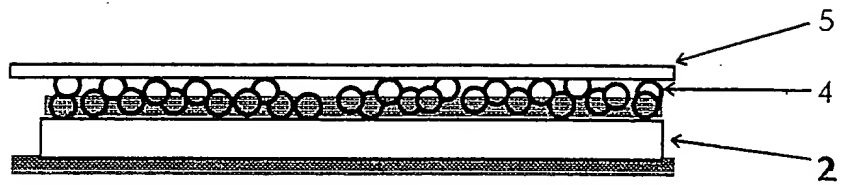


Fig.3

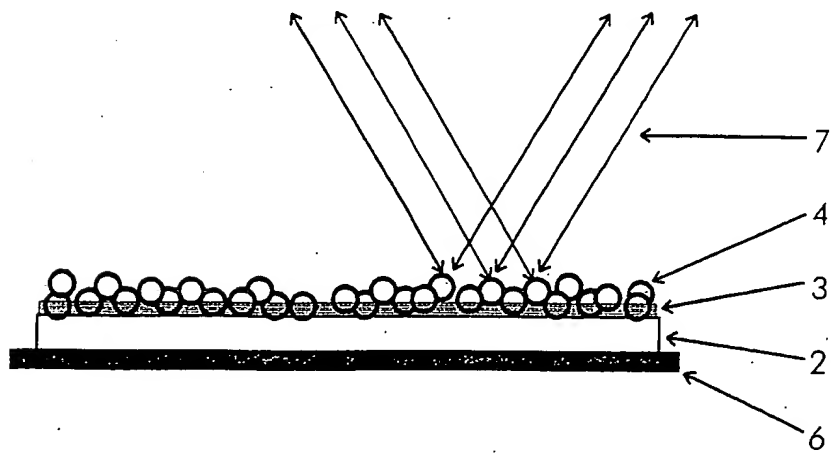

State of the Art

Fig. 4

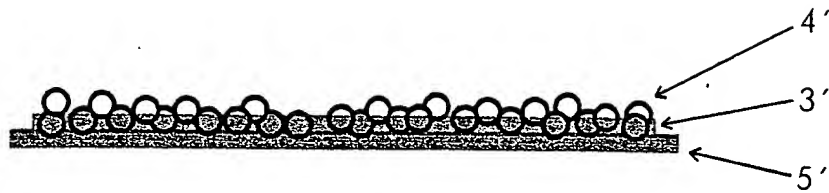


Fig. 5

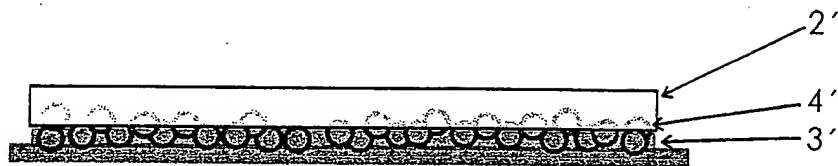


Fig. 6

